1901.


CATALOGUE

PATENT VISES



THE CHARLES PARKER CO., MERIDEN, CONN.

New York Salesrooms, 32 Warren Street.

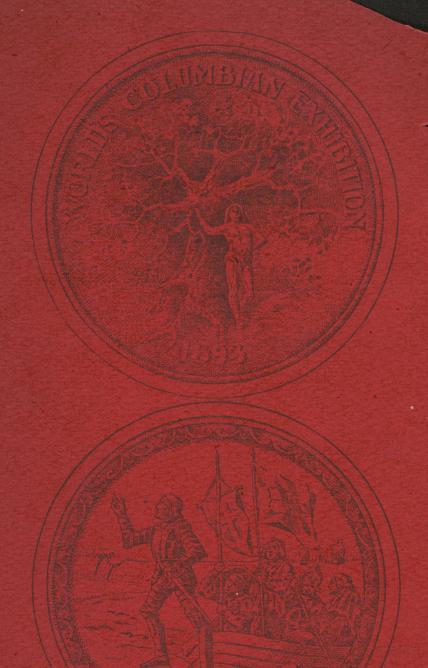

MEDAL OF AWARD

World's Columbian Exposition

PARKER'S PATENT VISES,

Ratchet and Geared Drills,

Locomotive Works, Car Builders,

MACHINISTS,

..... ADAPTED TO......


Gun, Sewing Machine and Carriage Manufacturers,

JEWELERS,

and Artisans Generally.

THE CHARLES PARKER CO.,

MERIDEN, CONN.

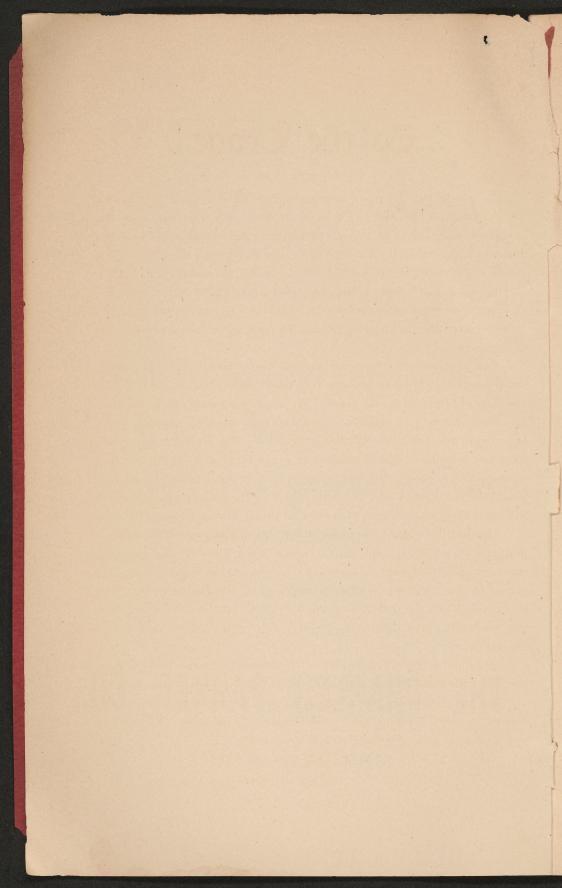

...To the Trade...

In presenting for your inspection and consideration this revised Catalogue and Price List of Vises, we desire to call attention to the very complete line illustrated therein, and to the many valuable and exclusive features embodied in the Parker Vises. For many years these goods have stood at the head of the market for excellence in construction, both in strength and finish, and our aim has been to constantly improve the line in every point where an improvement could be suggested, until today we have no hesitancy in claiming for our product superiority over all others in the market.

The very flattering reception accorded our Vises in the past demonstrates that our efforts to give the very best goods possible for the price are fully appreciated by the trade. We shall constantly aim to maintain this high standard of excellency, and zealously labor to improve where improvement is possible. We desire to call especial attention to the new lines just introduced and illustrated on pages 41, 42 and 43. There being a demand for a good low priced Vise, we have at much labor and expense produced the *Vulcan* line, and now offer it to the trade, confident that it will meet every requirement of a good all round Vise at a low price.

The line illustrated on pages 2 and 3, and designated X series, is designed to replace the old line of regular Black Vises of corresponding numbers, and to be sold at same list and discount as the old line, thus giving to the trade a very superior article at no advance in price. This line will be found to be what we claim for it, "the best in the market" and the lowest in price, strength, quality and finish being taken into consideration.


The line of Pipe Vises needs no introduction to the trade. They have been the standard for years and are known wherever Vises are used.

The name "Parker" on a Vise is a guarantee for workmanship and durability, and this reputation we shall constantly maintain. Soliciting a continuance of your esteemed patronage, we are

Respectfully yours,

THE CHARLES PARKER CO.

PARKER'S Patent Parallel Vises.

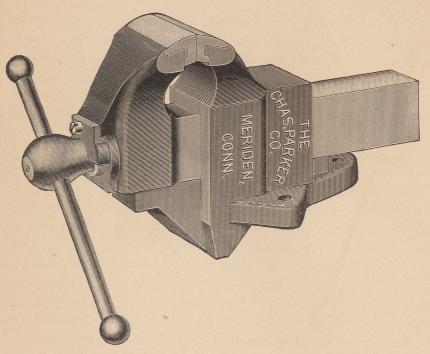


No. 3/0 x	Round Jaws,	each,	\$6.25
	Weight, 28 lbs. Length of Jaws, 3 1/4 inches.		
	Vise opens 4 ¹ / ₄ inches.		
No. 1 x.	Round Jaws,	each,	7.00
	Weight, 45 lbs. Length of Jaws, 33/4 inches.		
	Vise opens 5½ inches.		
No. 2 x.	Round Jaws,	each,	9.00
	Weight, 58 lbs, Length of Jaws, 41/4 inches.		
	Vise opens 6½ inches.		
No. 3 x.	Round Jaws,	each,	11.75
	Weight, 74 lbs. Length of Jaws, 43/4 inches.		
	Vise opens 8 1/4 inches.		
No. 4 x.	Round Jaws,	each,	16.25
	Weight, 104 lbs. Length of Jaws, 5½ inches.		
	Vise opens 9½ inches.		
No. 5 x.	Round Jaws,	each,	24.00
	Weight, 134 lbs. Length of Jaws, 61/4 inches.		
	Vise opens 10½ inches.		

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

PARKER'S Patent Parallel Swivel Vises.

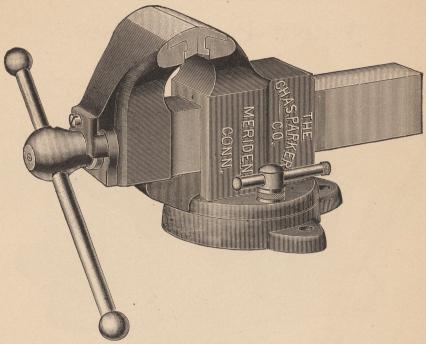

This Vise can be set up with tightening stud for swivel either right or left hand.

No. 21 x.	Round Jaws,		each, \$7.00
	Weight, 32 lbs. Length of Jaw	s, 3 1/4 inches.	
	Vise opens 4 1/4 inche	s.	

No. 22 x.	Round Jaws, .	. , ,		each,	8.75
	Weight, 50 lbs.	Length of Jaw	rs, 3¾ inches.		
	Vise	onens 51/2 inche	es		

		opens 9/2 menes.	
No. 23 x.	Round Jaws, .		each, 11.00
		T 11 CT 1=/: 1	
	Weight hallbs	Length of Jaws, 41/4 inches.	

	VISE	opens 072 mc	HCS.		
No. 24 x.	Round Jaws, .			each,	14.50
	Weight, 87 lbs.	Length of Ja	aws, 43/ inches.		

		vise ope	$ns 8 \frac{1}{4} inch$	ies.			
No. 25 x.	Round Jaws,					each,	20.50
	TTT 1 1 1 1 0	0 22 T		/ .	4		

T. 10. To II.	Too certice of the in the				,	
	TT7 ' 1 100 11	T 11 CT	FT/	1		
	Weight, 130 lbs.	Length of Ja	WS. D 1/2	inches.		
	11 016 100 1001	Tong on or ou	" 29 - 12	THE CALCUS.		
	77.	onong QI/ inch				


No. 26 x.			each, 30.00
	Weight 160 lbs	Lenoth of Jaws, 61/ inches.	

Vise opens 10½ inches.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

PARKER'S Patent Parallel Vises.

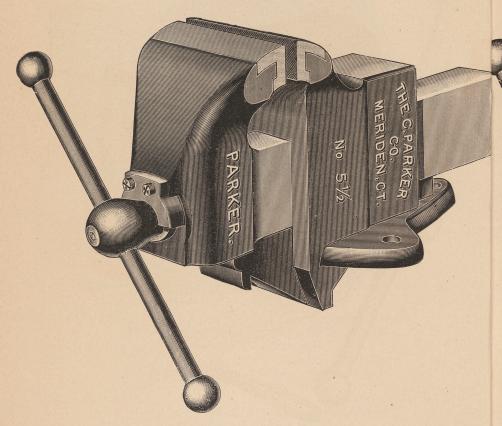

No. 5 ½ X. Round Jaws,

each \$30.00


Weight 190 lbs. Length of Jaws, 7 inches.

Vise opens $10\frac{1}{2}$ inches.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Patent Parallel Swivel Vises.

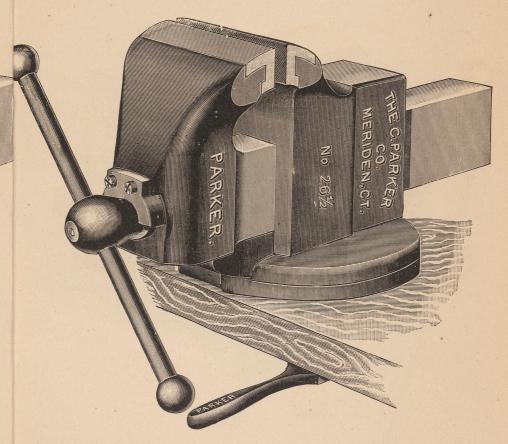

No. 261/2. Round Jaws,

each, \$35.00

Weight 202 lbs. Length of Jaws, 7 inches.


Vise opens 10½ inches.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

PARKER'S Patent Parallel Vise.

This Vise is designed to meet the requirements of Railways and Machine Shops for heavy work.

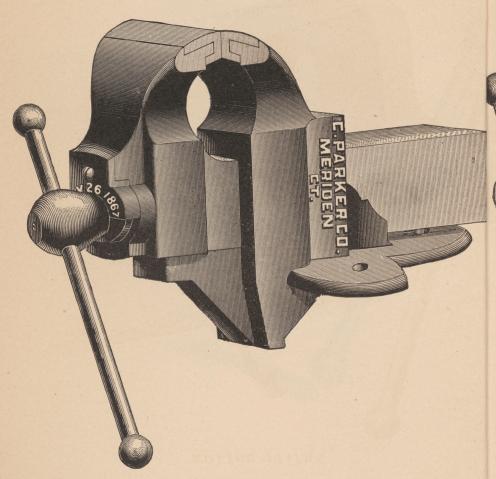


No. 60. Jaws, $8\frac{1}{8}$ incnes, each, \$50.00 Weight, 240 lbs. Opens, $12\frac{1}{2}$ inches.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

PARKER'S Heavy Railway Vise.

This Vise is recommended for use in Railway and Machine Shops, being especially strong and durable. Practical tests have occasioned its adoption by many of the leading railroad companies.

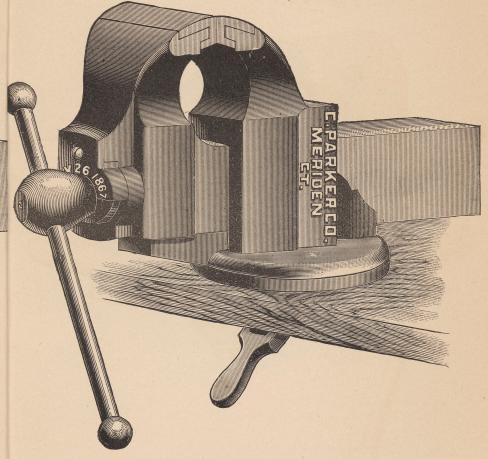

SWIVEL BOTTOM.

No. 260. Length of Jaws, $8\frac{1}{6}$ inches, . . . each, \$55.00 Weight, 250 lbs. Opens, $12\frac{1}{2}$ inches.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Patent Parallel Swivel Vises.

These Swivel Vises have Parker's Patent Cast Steel Anvil.



N o. 19.	Round Jaws, Swivel,		each, \$4.00	,
	Weight, 8 lbs.	Length of Jaws, 2 inches		
		•		
No. 20.			each, 5.00	
	Weight, 8½ lbs.	Length of Jaws, 2 1/4 inches.		
37 01	D 11 0 1			
No. 21.			each, 7.00	1
	Weight, 23 lbs.	Length of Jaws, 31/8 inches.		
No. 22.	Round Jaws, Swivel,	•	each, 8.75	
	Weight, 35 lbs.	Length of Jaws, 35% inches		

Discount Sheet on application.

ins

Patent Sudden Grip Vise.

These Sudden Grip Vises were exhibited for the first time at the World's Exhibition, Vienna, 1873, where they received the highest award over all other Vises, namely, the *Medal of Progress and Diploma of Honor*.


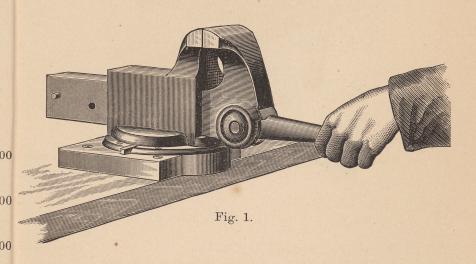


Fig. 1 is a perspective view of the Vise, showing the position of the handle when the operator desires to draw out the sliding jaw, in order to insert the work between the jaws. In this position of the handle the Vise can be swiveled on the bench.

75

Patent Sudden Grip Vise.

Fig. 2 is a perspective view of the Vise, showing the position of the handle when the jaws securely grasp the work. In this position of the handle the swivel is securely locked, and the Vise held in a fixed position on the bench.

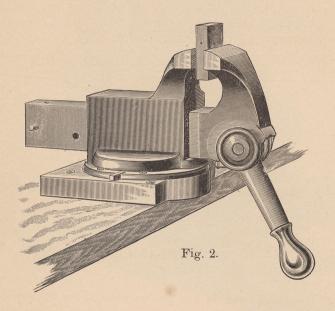

DIRECTIONS.

In order to open the jaws, lift the handle to a horizontal position, or as high as it will go, and draw towards you, as shown in Fig. 1. In this way the sliding jaw can be moved instantly to any position, and the Vise swiveled if desired. In order to grasp the work, push in the sliding jaw until it presses against the work, then depress the handle, as shown in Fig. 2, which causes the jaws to securely grasp the work, and at the same time lock the swivel.

Patent Sudden Grip Vise.

he on

or

is

se

W

n

10

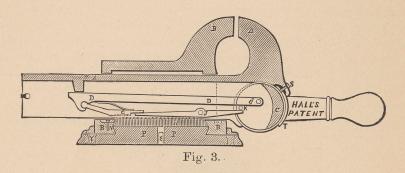


Fig. 3 is a sectional view of the Vise, showing its working parts.

EXPLANATION.

If the handle should not go low enough for convenience, it can be made to go lower by depressing it just before it touches the work to be held.


If the Vise swivels too easily, drive in the key (w) in the bottom plate; but if it does not turn easily enough, drive out the key slightly. If the handle fails to remain in a horizontal position, the screw (s) can be tightened to hold it. Care should be taken that the screw (n) is down, so as to keep the rack (h) from lifting with the clutch (g).

The sliding jaw can be removed by taking out the pin at the end of the slide, keeping the handle horizontal. If grease or dirt get on the rack (H), the slide should be withdrawn, and the rack and clutch thoroughly cleaned.

Patent Sudden Grip Vises.

ADVANTAGES.


These Vises are the most convenient and the quickest working Vises ever devised. They are the only Vises that grasp any sized piece of work by one motion of the hand only, and can be used with either right or left hand with equal facility. No other Vises have this Self-Acting Swivel, and unlike all other Swivel Vises, they do not require any bolts through the bench. The work is securely held in position by means of Steel Racks, as shown in Fig. 3, which merely engage without rubbing, so the parts can not wear and fail to operate, or have lost motion. These Vises are made of the best quality of material, so that the parts are strong and durable. They are manufactured with great care by the use of improved machinery, and so accurately made that the parts are interchangeable.

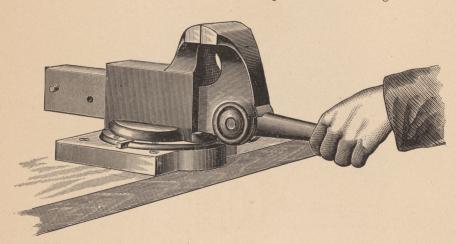

No.	90.	Lengt	h of Ja	aws, 2	inches,				each,	\$5.00
"	92.	66	66	3	"				66	8.50
	94.		- 66	-	"				66	12.50
66	98.	Coach	Maker	rs' Vis	e, length	of Jaws,	4 inche	s, .	. 66	14.00

Discount Sheet on application.


Patent Sudden Grip Jewelers' Vise.



No. 91. Length of Jaws, 2 inches,

each, \$4.00

Parker's Patent Jewelers' Vises.



each, \$3.00



No. 18. each, \$3.50 Length of Jaws, $1\frac{1}{2}$ inches. Weight, $2\frac{3}{4}$ lbs.

Discount Sheet on application.


Prices for Repairs for Vises, Pages 1 to 13, inclusive.

18 99 99 99 99 99 99 99 99 99 99 99 99 99	of Vise.
4 3 2 3 2 1 1 1 2 6 4 2 2 2 2 5 5 6 6 4 2 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	Slide.
22 24 25 25 25 25 25 25 25 25 25 25 25 25 25	Back Jaw.
11 50 50 00 00 00 00 00 00 00 00 00 00 00	Serew.
왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕 왕	Spring.
\$2 \$2 \$2 \$2 \$2 \$2 \$4 \$4 \$4 \$4 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5	Nut.
1 1 1 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Steel Jaws Each.
୍ଷ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ ଓ	Bench Bolt.
10 25 5 5 10 10 10 10 10 10 10 10 10 10 10 10 10	Bench Washer.
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Swivel Pin.
	Swivel Nut.
51 57 57 57 57 57 57 57 57 57 57 57 57 57	Swivel Bolt.
5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Base Bolt.
\$ 10 0 10 10 10 10 10 10 10 10 10 10 10 1	Bench Wrench.
82 55 55 55 55 55 55 55 55 55 55 55 55 55	Bench Flange.
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Bench Nut.
1 1 2 2 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Bench Swivel
1 1 00 1 50	Top Rack.
1 1 2 7 5 7 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Bottom Rack.
1 1 25 7 5 7 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Lever.
75 75 75	Handle.

PARKER'S Patent Swivel Victor Vise.

FOR EXTRA HEAVY WORK.

This Vise is designed to do same work as Vise No. 340, shown on Page 16. It has Swivel Bottom in addition to Swivel Back Jaw; the uses of which are obvious to all mechanics.

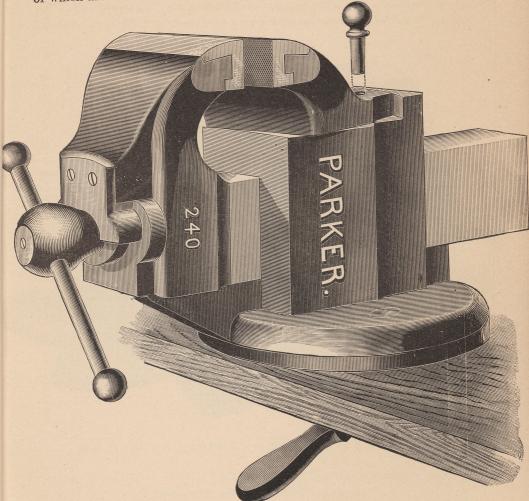

No. 240. Jaws, $7\frac{1}{2}$ inches, each, \$35.00 Weight, 200 lbs. Opens, 12 inches.


The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

PARKER'S Parallel Victor Vise.

FOR EXTRA HEAVY WORK.

Frequent demand for extra heavy Vises with Swivel Back Jaws, for use of Railroads, Machine Shops, Car Builders, etc., has occasioned our making this Vise. We recommend it as a tool meeting their requirements.

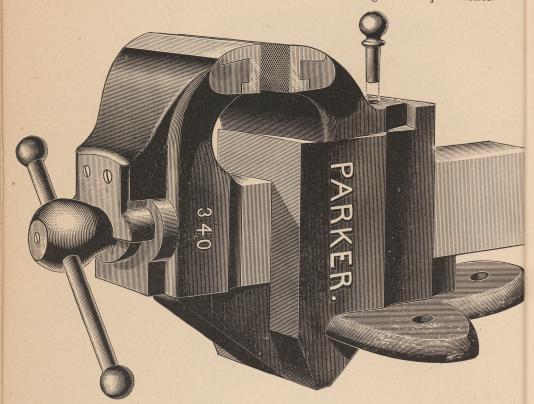

STATIONARY BOTTOM. SWIVEL BACK JAWS.

No. 340. Length of Jaws, $7\frac{1}{2}$ inches, . . . each, \$30.00 Weight, 185 lbs. Opens, 12 inches.


See page 15 for similar Vise with Swivel Bottom.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Patent Swivel Victor Vises.

. These Vises have Self-Adjusting Back Jaws, which automatically adapt themself for holding wedge shaped pieces.

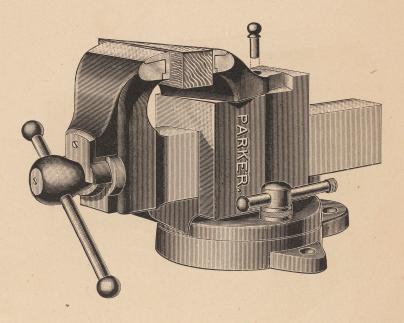

No.	.270.	Length	of Jaws,	31/4	inches;	weight	, 30	lbs.,	each,	\$7.00
"	271.	"	"	35/8	"	"	42	66	66	8.50
66	272.	"	"	4 1/2	44	66	60	66	"	12.50
66	273.	"	"	5	"	66	78	66	66	16.00
66	274.	"	"	5 1/2	"	• • • • • • • • • • • • • • • • • • • •	110	66	66	19.00
.6	275.	"	"	6 1/4	"		165	66	66	27.00


The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

See page 18 for Victor Vises, Stationary Bottom.

Discount Sheet on application.

Patent Parallel Victor Vises.

These Vises have Self-Adjusting Back Jaws, which automatically adapt themselves for holding wedge shaped pieces.

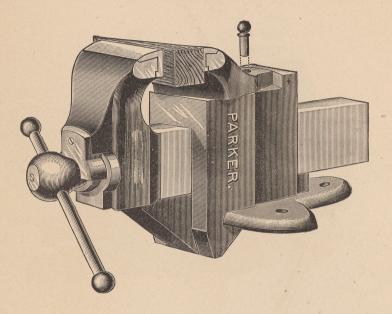

No.	370.	Length	of Jaws,	31/4	inches;	weight,	25	lbs.,	each, \$6.50	
66	371.	"	"	35/8	- 66	"	39	"	7.00	
66	372.	"		4 1/2	""	. 66	57	"	10.00	
"	373.	• • • • • • • • • • • • • • • • • • • •	"	5	"		73	"	14.00	
"	374.	66	"	5 1/2	"	"	98	"	17.00	
"	375.	"	"	61/4		"	150	"	24.00	


See page 17 for Victor Vises, Swivel Bottom.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Victor Swivel Filers' Vise.

With Swivel Jaw, giving instant adjustment to wedge-shaped pieces.

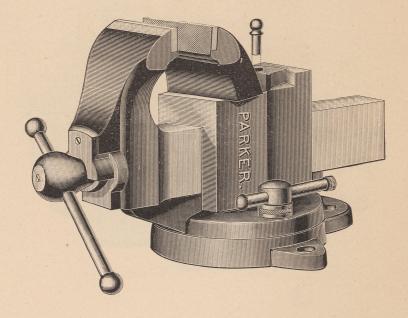


No. 278. Length of Jaws, 4 1/4 inches, each, \$10.00 Jaws open 5½ inches. Weight, 48 lbs.

Discount Sheet on application.

Victor Parallel Filers' Vise.


With Swivel Jaw, giving instant adjustment to wedge-shaped pieces.

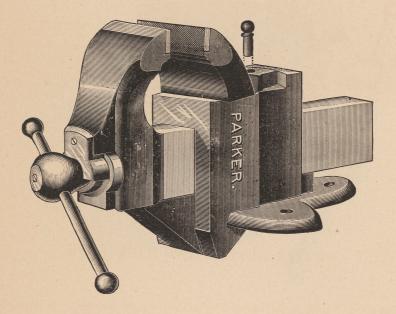

No. 378. Length of Jaws, $4\frac{1}{4}$ inches, . . . each, \$8.00 Jaws open $5\frac{1}{2}$ inches. Weight, 42 lbs.

Discount Sheet on application.

Victor Wood Workers' Vises.

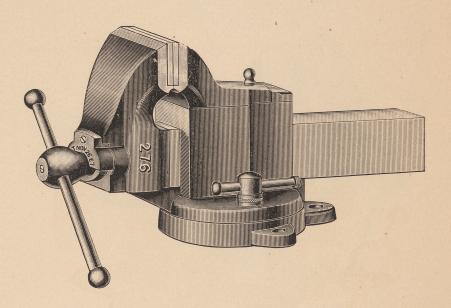


SWIVEL BOTTOM AND BACK JAWS.

No. 276. 4 inch Jaws, opens $7\frac{1}{2}$ inches, weight, 40 lbs., each, \$ 9.50 " 277. $4\frac{1}{2}$ " " " $9\frac{1}{2}$ " " " 65" " 13.00

These Vises have Self-Adjusting Back Jaws, which adapt themselves automatically to holding irregular shaped articles.

Discount Sheet on application.

Victor Wood Workers' Vises.

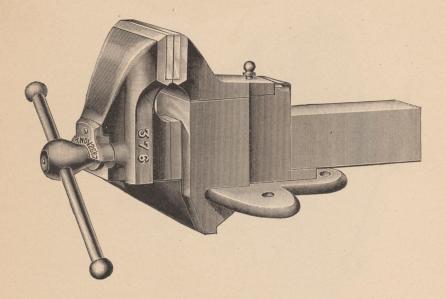


STATIONARY BOTTOM AND SWIVEL BACK JAWS.

No. 376. 4 inch Jaws, opens $7\frac{1}{2}$ inches, weight, 35 lbs., each, \$8.00 " 377. $4\frac{1}{2}$ " " " $9\frac{1}{2}$ " " 59 " " 11.00

These Vises have self-adjusting back jaws, which adapt themselves automatically to holding irregular shaped articles.


Discount Sheet on application.

Victor Watch Makers' and Jewelers' Vises.



STATIONARY BOTTOM.

No. 316.	Length of Jaws, 17/8 inches,	each	\$3.50
	Jaws open 2 inches. Weight, 4 lbs.		
	Same, Nickel Plated,	"	5.75
No. 318.	Length of Jaws, 21/8 inches,	"	4.00
2,0,0	Jaws open 21/4 inches. Weight, 5 lbs.		
	Same, Nickel Plated.	66	6.50



SWIVEL BOTTOM.

No. 216.	Length of Jaws, 1½ inches, Jaws open 2 inches. Weight, 4½ lbs.	each	\$4.50
	Same, Nickel Plated,	"	6.75
No. 218.	Length of Jaws, 21/8 inches,	66	5.00
	Jaws open 2½ inches. Weight, 6 lbs. Same, Nickel Plated,	"	7.50


Black Vises will be sent on orders, unless "Nickel Plated" is mentioned.

Discount Sheet on application.

Prices for Repairs on Vises, Pages 14 to 23, inclusive.

	No. of Vise.
22 22 22 24 77 72 22 22 22 22 22 22 22 22 22 22 22	Slide.
114 00 114 00 114 00 115 00	Back Jaw.
1 1 50 00 00 00 00 00 00 00 00 00 00 00 00	Screw.
26 66 66 66 66 66 66 66 66 66 66 66 66 6	Spring.
S S S S S S S S S S S S S S S S S S S	Nut.
1 1 00 5	Steel Jaws Eech.
22 22 22 25 35 35 35 35 35 35 35 35 35 35 35 35 35	Bench. Bolts.
20 20 20 20 20 20 20 20 20 20 20 20 20 2	Bench Washer.
1 00 1 25 1 26 1 26 1 27 1 26 1 27 1 27 1 27 1 27 1 27 1 27 1 27 1 27	Swivel Jaws Each.
6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	Swivel Pin.
EL 22 23 25 25 25 25 25 25 25 25 25 25 25 25 25	Bench Wrench.
22 22 25 55 55 55 55	Bench Flange.
1 00 1 00 1 00 1 25 0 00 1 25 0 00 00 00 00 00 00 00 00 00 00 00 00	Tighten-
	The state of the s

Patent Combination Pipe Vises.

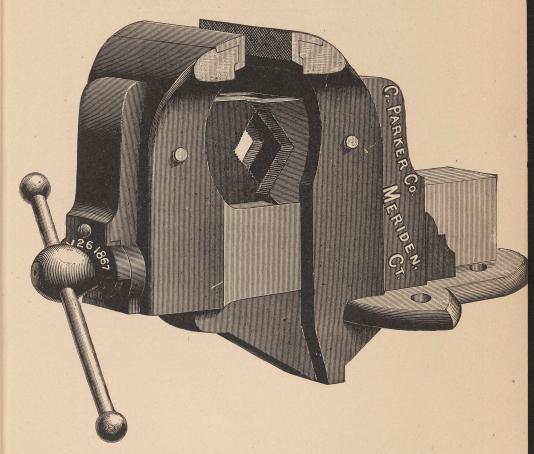


No. 88½. Round and Pipers' Jaws, weight, 94 lbs., each, \$28.00 For holding 4 inch pipe and under. Length of Jaws, 4¾ inches.

No. 89½. Round and Pipers' Jaws, weight, 141 lbs., each, \$35.00 For holding 6 inch pipe and under. Length of Jaws, 5¾ inches.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Patent Combination Pipe Vises.

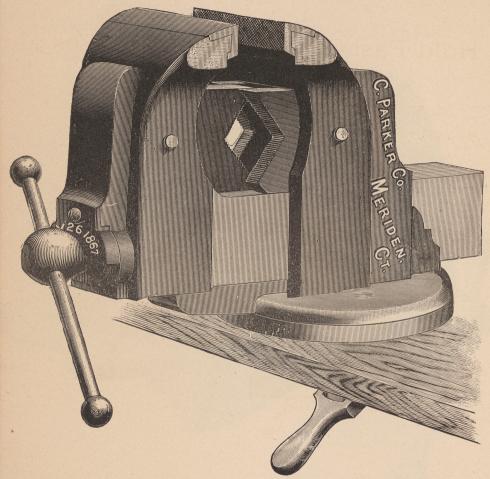

No. 87. Round and Pipers' Jaws, weight, 41 lbs., each, \$16.00 For holding 2 inch pipe and under. Length of Jaws, 35% inches.

No. 88. Round and Pipers' Jaws, weight, 59 lbs., each, \$20.00 For holding 3 inch pipe and under. Length of Jaws, 4½ inches.

No. 288½. Round and Pipers' Jaws, weight, 105 lbs., each, \$28.00 For holding 4 inch pipe and under. Length of Jaws, 4¾ inches.


No. 289½. Round and Pipers' Jaws, weight, 155 lbs., each, \$35.00 For holding 6 inch pipe and under. Length of Jaws, 5% inches.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Hold-Fast Combination Pipe Vises.

The Slides and Jaws of these Vises are made of the best quality of steel, and every part is carefully constructed. They are light and very strong and a first class Vise for general work.

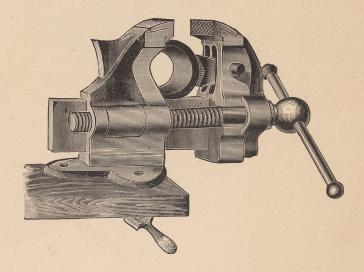

No. 870.	Takes pipe	1/8 to 2	inches,		each, \$ 8.50
					" 11.00

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

... To the Trade...

We desire to call especial attention to the Vise illustrated on Page 29 and its adaptability as a tool to the many uses to which a Vise is put. It combines in one a Machinists', Steam Fitter or Plumber and Woodworkers' Vise, by a very slight change, easily made.

No. 81. Is as shown in illustration, with Round Jaws only, and is designed for Machinists' use.


No. 82. Is as shown in illustration, without the Round Jaws, but having Pipe Jaws for Steam Fitters or Plumbers use.

No. 86. Is as shown in illustration, with both Round and Pipe Jaws interchangeable.

No. 83. Is as shown in illustration, with Round, Pipe and Coach-makers' Jaws, making a combination unequalled by any other Vise, and adapted to all classes of work. All the parts of these Vises are made on our high standard of excellence and can be renewed at any time.

Patent Vises.

WITH INTERCHANGEABLE JAWS.

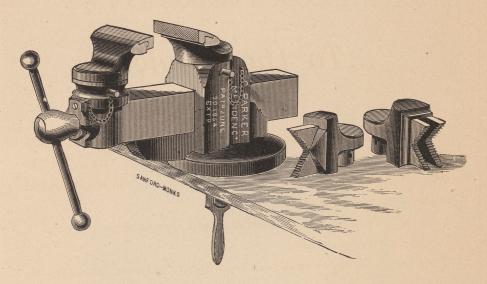

Above illustration shows No. 86 Vise complete.


No. 81.	Same as illustration, but with Round Jaws only, Both Jaws Interchangeable. Weight, 60 lbs.	each,	\$12.50
" 82.	Same as illustration, but with Pipers' Jaws only, Both Jaws Interchangeable. Weight, 63 lbs.	66	12.50
« 86.	See illustration,	46	14.75
" 83.	Same as illustration, and has Coachmakers' Jaws, in addition to Round and Pipers' Jaws, Both Jaws Interchangeable. Weight, 91 lbs.	66	16.00

The steel faces of these Vises are miled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Patent Coach Makers' Vise.

Designed for the use of Carpenters, Cabinet Makers, Pattern Makers and Wood Workers generally.

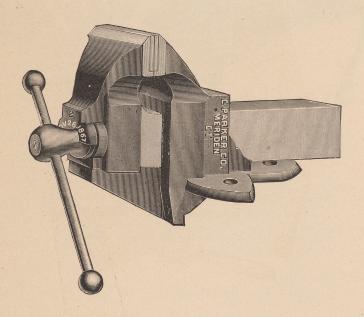


No. $40\frac{1}{2}$. $4\frac{1}{2}$ inch Jaws, opens $9\frac{1}{2}$ inches, . each, \$10.25

Discount Sheet on application.

Swivel Coach Makers' Vise.

Designed for the use of Carpenters, Cabinet Makers, Pattern Makers and Wood Workers generally.

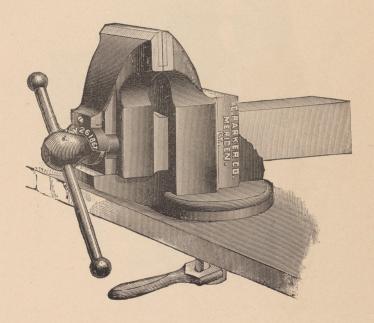


No. $46\frac{1}{2}$. $4\frac{1}{2}$ inch Jaws, opens $9\frac{1}{2}$ inches, .

each, \$12.50

Discount Sheet on application.


Patent Filers' Vises.

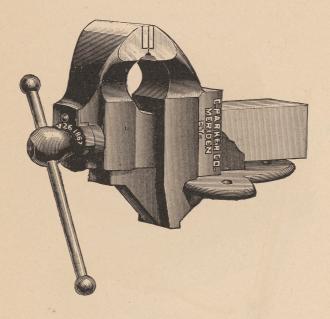

No. 42. Length of Jaws, 4 inches; weight, 33 lbs., each, \$7.25 $^{\prime\prime}$ 42 $^{1}\!\!/_{2}$. " " $^{\prime\prime}$ 31/4" " 30 " " 6.75

Discount Sheet on application.


Swivel Filers' Vise.

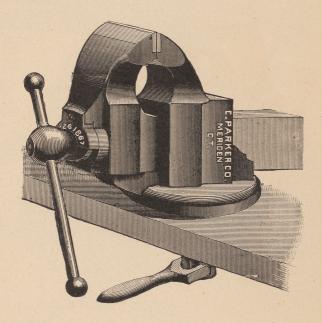

No. 44. Length of Jaws, 4 inches; weight, 37 lbs., each, \$8.75

Discount Sheet on application.

Oval Slide Vises.

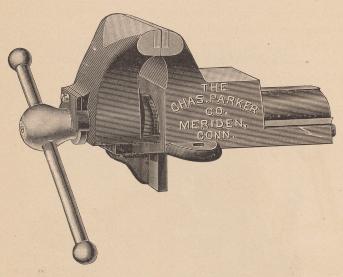


No	. 30.	Oval Slide,	each	, \$2.50
"	31.	Oval Slide,	"	3.00
66	32.	Oval Slide,	"	4.25
66	33.	Oval Slide,	"	4.75
66.	34.	Oval Slide,		6.50
66	35.	Oval Slide,		9.50
66	36.	Oval Slide,		12.00

Discount Sheet on application.

Patent Swivel Heavy Chipping or Filing Vises.

These Vises are made exceedingly strong to allow chipping or filing without danger of breaking the Vise.

The Steel Jaws are closely fitted and held by screws, so after years of use new ones may easily be substituted. The screw is encased and thoroughly protected, and so located that the operator may obtain its full power. The Back Jaw is the movable one, which allows the work to rest upon the bench while the Vise is being operated.

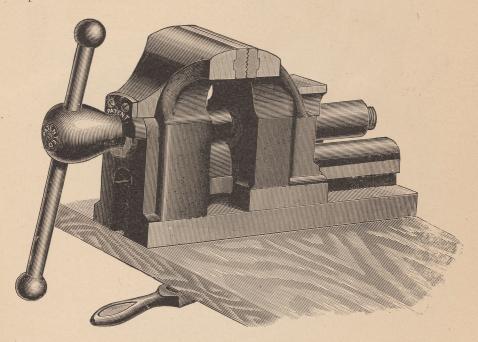

SWIVELS ON THE BENCH.


No.	65.	Length	of Jaw	s, 5	inches;	weight,	80 lbs.,	each, \$16.00
"			"				110 "	" 21.00

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Die Sinkers' Adjustable Vise.

This cut represents a common Bench Vise, with the Ball Attachment It is very convenient for filing mills, reamers, drills, etc., as it can be set in an instant so as to get the required light on the work. It is pronounced by all to be the handiest Vise yet invented.

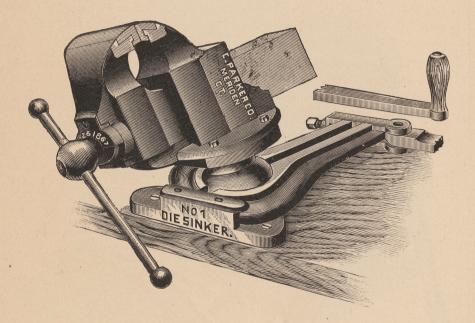

DIRECTIONS FOR SETTING UP THE VISE.


Cut a hole or nest into the bench of sufficient size for the ball to revolve in without hitting in the center; bore an inch hole through the bench to let the chips through; set the front of the Vise even with the edge of the bench; oil the joints, etc. If the Vise is too loose, turn up the set-screw in the clasp.

Die Sinkers' Adjustable Vise.

The Charles Parker Company, of Meriden, Conn., Sole

Manufacturers for the United States.

This cut represents a Die Sinkers' Vise, suitable for every variety of work and dies. It is operated by means of a lever, and can be adjusted in an instant to any required angle. The Vise is held so firm that the force of the heaviest blow will not remove it.

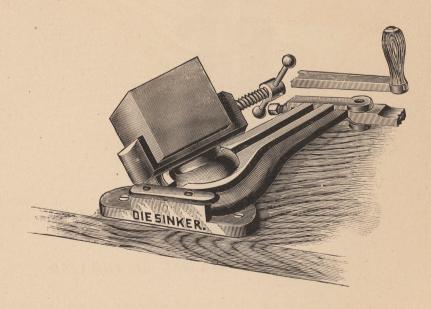


Each,

\$7.00

Saw Filers' Vise.


This Vise is made expressly for holding saws for filing, and is recommended to Carpenters, Joiners, etc., who desire to file their saws without springing. The Jaws are faced with leather, and hold the saw very tightly.

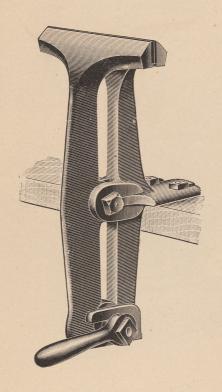

No. 43. Length of Jaws, 9 to 14 inches; weight 23 lbs., each, \$3.50

Adjustable Saw Filers' Vise.

This Vise is jointed near the bench by means of which the Jaws can be thrown forward or backwards. A very handy tool for Carpenters, Joiners and Cabinet Makers. Easily fitted to Tool Box.

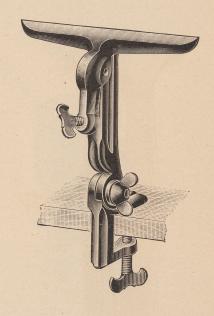

No. 43½.


each, \$1.50

Length of Jaws, 8 in. Weight, 6½ lbs.

Discount Sheet on application.


Patent Adjustable Saw Filers' Vise.

For filing Circular Saws. Can file from five inch to twenty-four inch saws, and is easily and quickly adjusted to different sizes of saws.

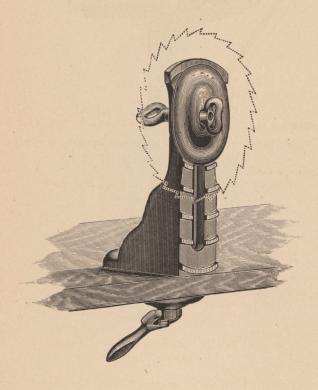

No. 47. Weight, 21 lbs.

PARKER'S VULCAN Patent Parallel Stationary Vises.

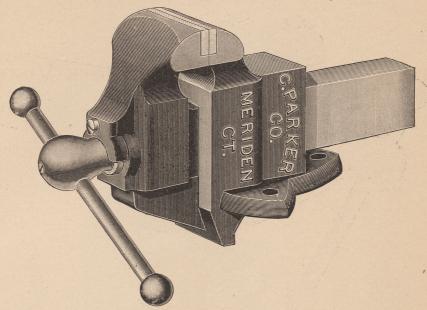

SOLID STEEL FACED JAWS. EXTRA STRONG SLIDE AND SCREW.


Designed to Supply the Requirements for a Strong, Durable, Medium Priced Vise.

No. A.	Round Jaws,	each, \$6.00
	Weight, 25 lbs. Length of Jaws, 31/4 inches.	
	Vise opens 4½ inches.	
No. B.	Round Jaws,	oooh 7.00
	Weight, 28 lbs. Length of Jaws, 35% inches.	each, 7.00
	Vice or an 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
3T 0	Vise opens 5 inches.	
No. C.	Round Jaws,	each, 8.50
	Weight, 46 lbs. Length of Jaws, 41/8 inches.	
	Vise opens 5½ inches.	
No. D.	Round Jaws,	oool 10.00
	Weight, 60 lbs. Length of Jaws, 45% inches.	each, 10.00
	Weight, of lbs. Deligth of Jaws, 4% inches.	
NT 13	Vise opens 6½ inches.	
No. E.	Round Jaws,	each, 13.00
	Weight, 74 lbs. Length of Jaws, 5 inches.	
	Vise opens 7 inches.	
No. F.	Round Jaws,	1 10 50
	Weight 100 lbg Targett of T	each, 18.50
	Weight, 100 lbs. Length of Jaws, 5½ inches.	
	Vise opens 8 ½ inches.	
No. G.	Round Jaws,	each, 25.00
	Weight, 135 lbs. Length of Jaws, 6 inches.	, 20.00
	Vise opens 9½ inches.	
	opens 0/2 menes.	

Discount Sheet on application.

For Price List of Repairs on these Vises, see page 44.

PARKER'S VULCAN Patent Parallel Swivel Vises.

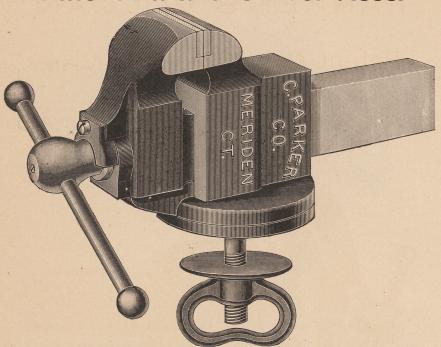

SOLID STEEL FACED JAWS. EXTRA STRONG SLIDE AND SCREW. Designed to Supply the Requirements for a Strong, Durable, Medium Priced Vise. No. AA. Round Jaws, each, \$7.50 Weight, 28 lbs. Length of Jaws, 31/4 inches. Vise opens $4\frac{1}{2}$ inches. No. BB. Round Jaws, each, 8.75 Weight, 37 lbs. Length of Jaws, 35/8 inches. Vise opens 5 inches. No. CC. Round Jaws, each, 10.50 Weight, 52½ lbs. Length of Jaws, 4½ inches. Vise opens 5½ inches. No. DD. Round Jaws, each, 12.50 Weight, 66 lbs. Length of Jaws, 45% inches. Vise opens 6 ½ inches. No. EE. Round Jaws, each, 16.00 Weight, 86 lbs. Length of Jaws, 5 inches. Vise opens 7 inches. No. FF. Round Jaws, each, 22.00 Weight, 115 lbs. Length of Jaws, 5½ inches. Vise opens 8½ inches. No. GG. Round Jaws, each, 30.00 Weight, 156 lbs. Length of Jaws, 6 inches. Vise opens 9½ inches.


Discount Sheet on application.

For Price List of Repairs on these Vises, see page 44.

PARKER'S VULCAN

Patent Coach Makers' Vise.

Designed for the use of Carpenters, Cabinet Makers, Pattern Makers and Wood Workers generally.

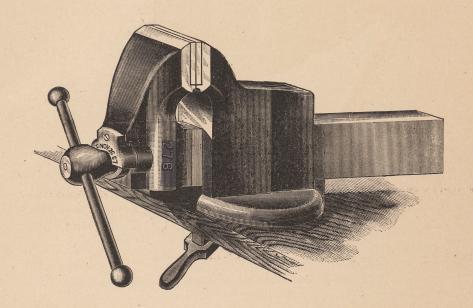

No. H. Par	allel,			each,	\$10.50	950
No. H. H. Sw	ivel,			"	12.50	1150


Weight 59 lbs. Length of Jaws $4\frac{1}{2}$ inches. Vise opens $9\frac{1}{2}$ inches.

Discount Sheet on application.

S. C. Carrier															14											-		-	-			-	4				-		11/		_		-	10000	:
HH 66	FF	D				4.4	=	P	4		15	30	2:	==	^	66	65	30	30	3 34	9 3	20 1	39.	22 ;	30	421%	40	44	461/2	401/2	86	ဒ္	82	20	088	870	289:2	2881/2	88	87	891/2	30 X 1 X		of Visc.	No
5 50 2 00	3 50	2 50	1 75	1 50	1 25		2 00		-			7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7						2 00				75	77	60	50			-	3 50	3 50	4 00		3 00		3 50	2 50				_	_	4 50		.Slide.	
6 50 4 25					1 75				4 50	3 50					1 50			3 00						75	75			7 00		6 00	7 00	6 50	-	1			6 50					5 50		Jaw.	Darek
2 00		-	1 75	1 50	1 50	1 50	1 50			200								6/ 1		200	1 97	1 00	1 00	75	75	1 ::0	1 50	1 50	2 :0	1 50	1 50	1 50	1 50	1 50	1 50	1 50			1 50			2 50		Screw.	
33 33	35	35.	32 3	32	35	35	35	35	30	00	200	25.	337	35	35			30	00	<u>ي</u> و و	200	32,	35	35	35	35	35	35	35	35	35	35	35	35				35	35	35		35		Spring.	
32 33	35	35	32	35	35	35	35	35	30	000	900	35	35	35	35	35	35	G.:	20	0 10	51	25	25	25	25	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35	30	35	2	Nut.	
																50	00	70													50	50	50	50	50	50	65	50	50	50	65	00	5	Each.	Steel
25	25	25	25	25	25	25										50	00	7										25			25	25	25	. 25	25	25	25		25	25				Bolt.	
25	25	25	25	25	25	25										25	62	2										25			25	25	25	25	25	25	25		25	25	2			Washer.	Bench
																															1 50	1 50	1 50		1 00	75			00 1			200		Per Pair.	Pipe
								7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																									1 50											Each.	Swivel
25																															25	25	25	25										Pin.	Swivel
25																62	24	200										25	20	2	25	25	20	25	10	10	220	62.	020	020	7			Wrench.	Bench
25	35	35	25	25	25	25	,																					00	00	7	00	00	50	00	,		00	00	62	62	200			Flange.	Bench
25	50	50	50	50	30	62	2									25	5 15	95										67.	022	27	67.	62	25	67.	62	67.0	220	GZ CZ	022	620	27			Nut.	Bench
39 35 37 5	2 2	200	25	25	25	25	2																																						
-																									•																				
-	-	-	-	-					100							1111		100			100	100	-						79.5	123	977	100			110									2007	777

PARKER'S Parallel Vises.

WITHOUT PARKER'S IMPROVEMENTS.

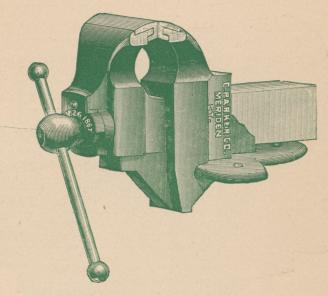

The Parker Vises, having been imitated in the market, the following numbers will be furnished, which correspond in length of Jaws and weight to the imitation Vises, but do not have any of our patented improvements. They are equal in strength to any Vise in market, with the exception of our first quality. For the purchaser's protection, these Vises are painted green, so that they can be easily distinguished from our regular Vises.


No.	0000.	Lenght of	Jaws,	31/4	inches;	weight,	23	lbs.,	each,	\$5.50
66 :	100.		"	35/8		66	31 1/2		"	6.50
66	200.		66	41/8	66	64	41 1/2	"	"	8.50
66	300.	"	66	43/4	66	"	59 1/2		66	10.00
66	400.	"	66	53/8	"	66	83	66	66	16.00
66	500.	"	"	61/8	"	66	120		"	23.75

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

PARKERS Heavy Railway Vise.

This Vise is specially adapted for use by Railways and Machine Shops requiring a trusty tool for heavy work.

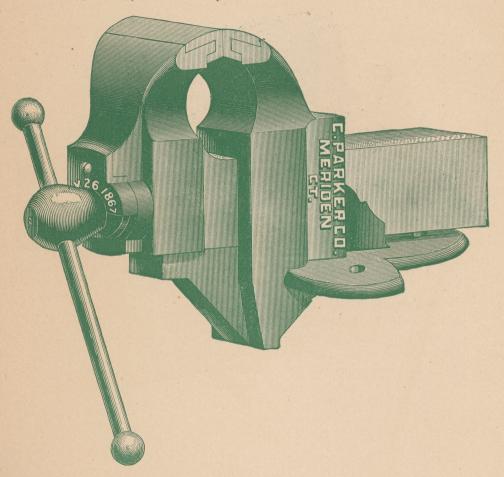

STATIONARY BOTTOM.


No. 600. Length of Jaws, 81/8 inches; weight, 240 lbs., each, \$45.00

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Heavy Railway Vise.

This Vise is designed to meet the requirements of Machine Shops, Railways, etc., needing a Vise of special strength.

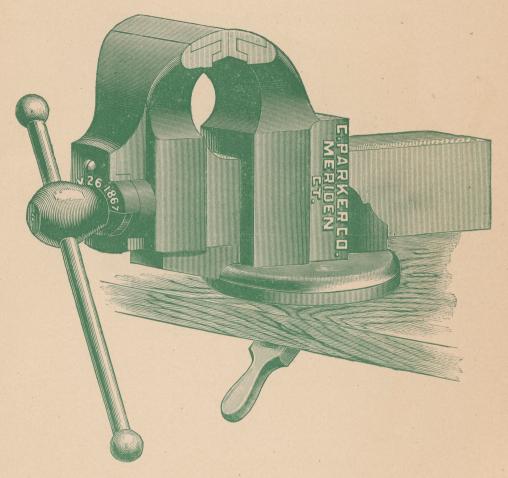


SWIVEL BOTTOM.

each, \$50.00

Discount Sheet on application.

Swivel Vises.

WITHOUT PARKER'S IMPROVEMENTS.

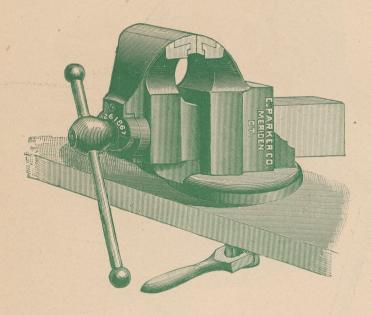


No.	2000.	Length	of Jaws,	21/4	inches;	weight,	8 1/2	lbs.,	each,	\$1.00
"	2100.	"	66	3 1/8	66	"	23	66 .	"	6.25
66	2200.	"	"	35/8	. "	"	35	66	"	8.00
66	2300.	"	"	4 1/8	"	66	48	"	66	10.00
"	2400.	66	66	43/4	"	66	63 1/2	66	"	13.25

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Pipe Vise.

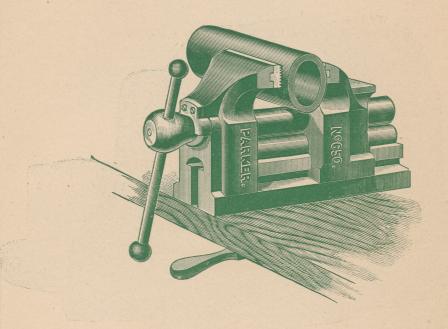

SWIVELS ON THE BENCH.

No. 650. Length of Jaws, 5 inches; weight, 80 lbs., For holding 7 inch pipe and under. each, \$12.00


The faces of these Vises are made coarse and will be found equally serviceable for holding all common work, in addition to its use as a Pipe Vise.

The steel faces of these Vises are milled and fitted to the Jaws and are renewable at a trifling cost.

Discount Sheet on application.

Combination Pipe Vises.

WITHOUT PARKER'S IMPROVEMENTS.

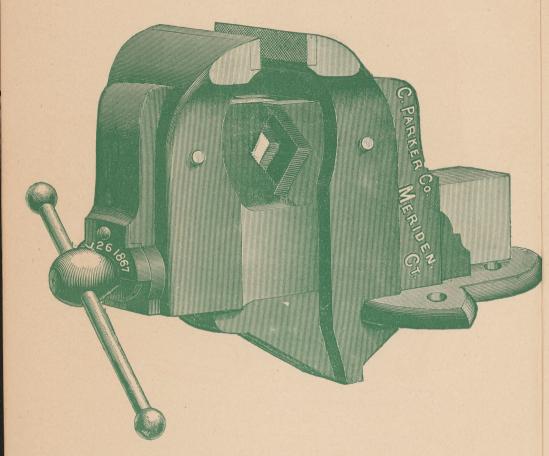


No. 188½. Round and Pipers' Jaws; weight, 94 lbs., each, \$28.00 Length of Jaws, 4¾ inches. For holding 4 inch pipe and under.

No. 189½. Round and Pipers' Jaws; weight, 141 lbs., each, \$35.00 Length of Jaws, 5¾ inches. For holding 6 inch pipe and under.

The steel faces of these Vises are welded on and not fitted, and renewable as on Nos. $88\frac{1}{2}$, $89\frac{1}{2}$, $288\frac{1}{2}$ and $289\frac{1}{2}$.

Discount Sheet on application.

PARKER'S Combination Pipe Vise.

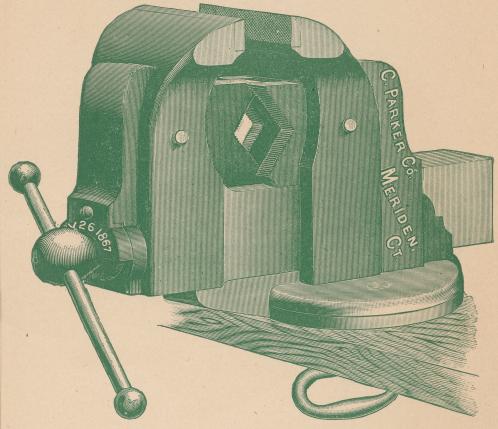

No. 187. Round and Pipers' Jaws; weight, 41 lbs., each, \$16.00 For holding 2 inch pipe and under.

No. 188. Round and Pipers' Jaws; weight, 59 lbs., each, \$20.00 For holding 3 inch pipe and under.


No. 488½. Round and Pipers' Jaws; weight, 105 lbs., each, \$28.00 Length of Jaws, 4¾ inches. For holding 4 inch pipe and under.

No. 489½. Round and Pipers' Jaws; weight, 155 lbs.. each, \$35.00 Length of Jaws, 5¾ inches. For holding 6 inch pipe and under.

The steel faces of these Vises are welded on and not fitted, and renewable as on Nos. 88½, 89½, 288½ and 289½.

Discount Sheet on application.


Coach Makers' Vise.

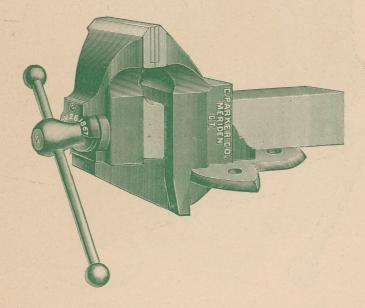

No. 4000. Length of Jaws, 4 inches; opens, 8 inches, each, \$10.00

Discount Sheet on application.

Swivel Coach Makers' Vise.

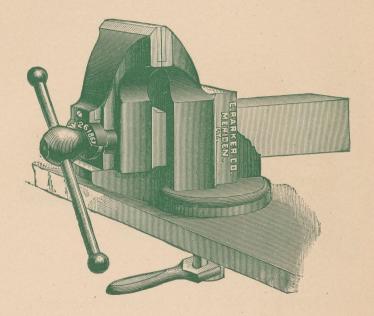


SWIVEL BOTTOM.

No. 4600. Length of Jaws, 4 inches, opens, 8 inches, each, \$12.50

Discount Sheet on application.

Patent Ratchet Drills.

The working parts of these Drills are simple and durable, and being made with great care, fit very accurately. The lever can be worked in a smaller space than other drills, and the working parts, being encased, are protected from dust and injury.

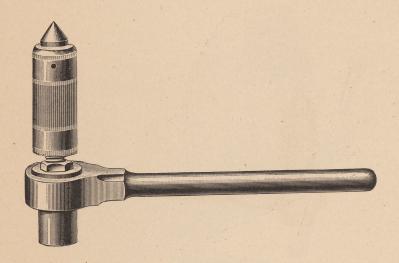


THE ENTIRE SURFACE IS HIGHLY POLISHED.

No.	4.	10	inch	Leve	r, .						each,	\$5.75
	5.	12	66	66		1		*			. "	6.00
		15		66				*			"	7.00
	$6\frac{1}{2}$.	17	"	66							"	7.50
66	7.	20	٠.	"			,				"	8.00

NICKEL PLATED.

				Lever,						each,	\$7.50
"	15.	12	. 66	: 66						"	8.00
66	16.	15	"	"						"	9.50
. 66	17,	20	66	"						. 46	12.00

Patent Boiler Ratchet Drills.

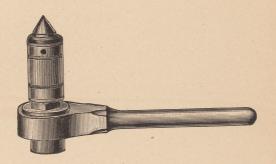


THE ENTIRE SURFACE IS HIGHLY POLISHED.

No. 8.	10 inch Lever,	0	e	•	e	each,	\$5.50
« 9.	12 " "	e e		G		.66	6.00


Price List for Repairs on Vises, Pages 39 to 50, inclusive.

	_											101													7																												_	
-																		4600	1000	4000	000	650	TOU/2	1801/	100/2	1001/	200	-	187	10072	1001/	1881/2	100	160	2400	1000	9300	2200	0012	2000	9000	600	500	400	2000	200	200	OOL	100	0000		Vise.		
															The second second								000				2 50		2 00														10 75									Slide.		
																							0 00		0 00		3 50		3 00			5 00						2 50					13 25									Back Jaw.		
								The second second										1 50					0 00				1 50		1 00			2 50					1 50	1 50	1 00	61			2 00				1 50	1 00	1 50	1 50		Screw.		
															*			35	000	325					66	36	35	000	22.5			35			35	000	357	35	35	30	2			35	200	35	35	000	2,5	35		Spring,		
																		35	000	35	000	325	00	27	GO	27.0	35	000	32	00	27.5	35	000	50	35	000	35	35	35	00	200	50	35	50	200	35	35	00	35	35		Nut.	2000	
																					00	50	00	C.T.						60	n n		00	50	50	00	50	50	50			1 50	65	ne	200	50	50	00	л	50	THOUTE	Jaws Fach.	Q+ool	
																		25		25	T C	25	20	27			25	1	25				t c	25	25	000	25	25	25	GZ	210	95										Bench Bolt.		
					THE PROPERTY OF THE PARTY OF TH													67	1	25	1	25	200	27			25		25				10	25	25	0 1	25	25	25	OI	10	95										Washer. Wrench.		
																THE REAL PROPERTY.					-	25	010	27	67	22	25	1 0	25				00	35	25	10	25	25	25	GZ	20				A CONTRACTOR									
														,	The second second								000	50	20	27	67.		25					75	50	100	50	50	22	22	25									,		Flange.		
																					1	25	10	25	67	27	67.	1 5	225				10	25	67.	10	25	25	67.	67	25					The second second					-	Bolt.		-
																											09 1																									Jaws PerPair.	Pine	
																The second second																																						
	-																																																					The Person Name and Address of
	-																																																		-			The second secon
	-																																																					-
	1	Ė	-	-	-		i			-	-																																											ø


Price list for por

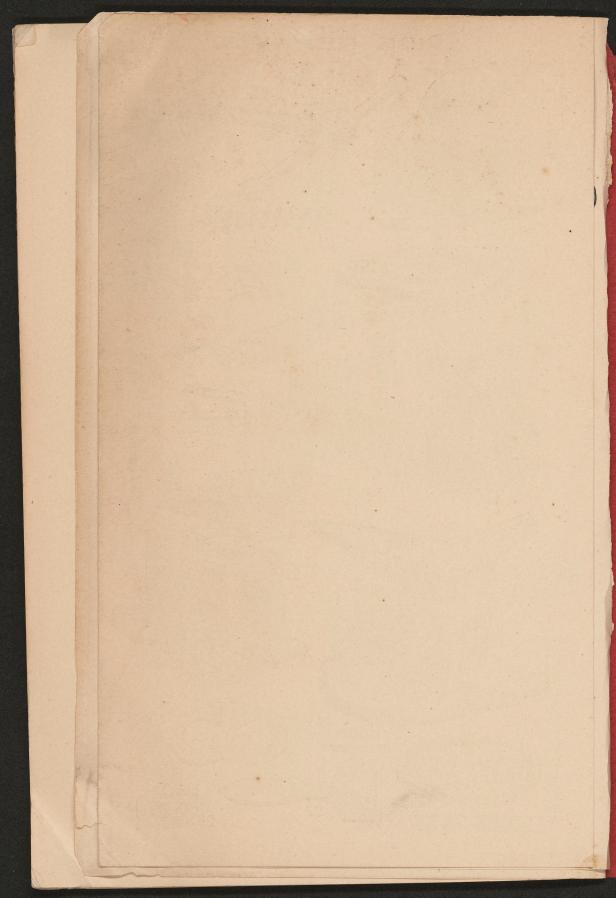


VISE REPAIRS.

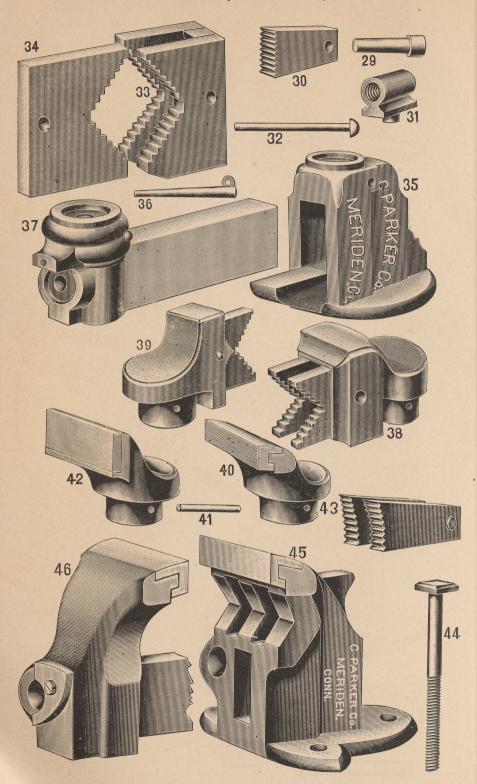

VISE REPAIRS.

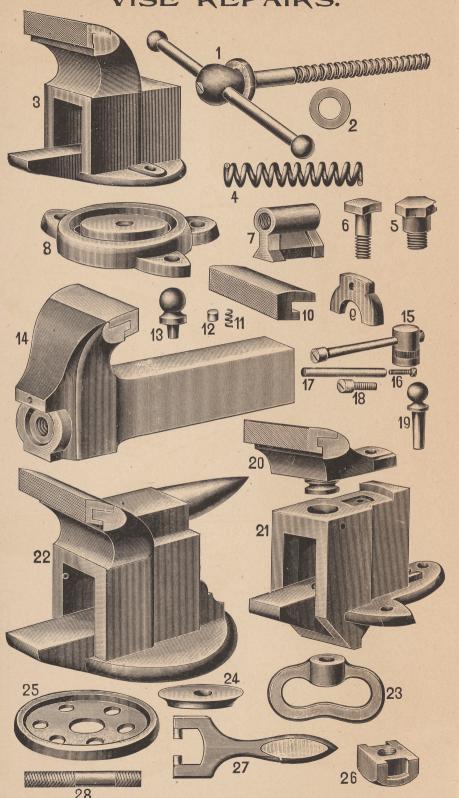

VISE REPAIRS.

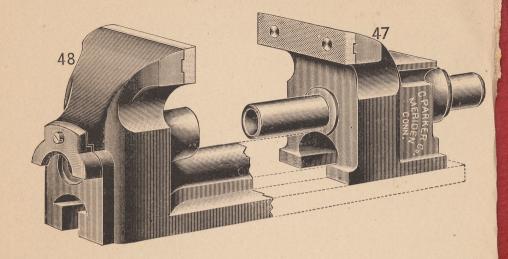

- 1. Screw.
- Washer.
- 3. Back Jaw.
- 4. Spring.
- Base Bolt.
- 6. Swivel Bolt.
- 7. Nut.
- 8. Swivel Base.
- 9. Saddle.
- 10. Steel Jaw.
- 11. Lever Spring.
- 12. Lever Plug.
- 13. Swivel Pin.
- 14. Slide.
- 15. Tightening Nut with Handle.
- 16. End Screw of Handle.
- 17. Handle.
- 18. End Screw.
- 19. Jaw Pin.
- 20. Swivel Jaw.
- Base.
- 22. Back Jaw, complete.
- 23. Handle Nut.
- Bench Washer.
- 25. Bench Flange.
- Bench Nut.
- 27. Bench Wrench.

- 28. Bench Bolt.
- 29. No. 870 Pipe Jaw Pin.
- 30. No. 870 Pipe Jaw.
- 31. Oval Slide Nut.
- 32. Pipe Jaw Pin.
- 33. Female Pipe Jaw.
- 34. Male Pipe Jaw.
- 35. No. 81 Series Back Jaw.
- 36. No. 86 Swivel Pin.
- 37. No. 81 Series Slide.
- 38. No. 81 Series Interchangeable Jaw, with Female Pipe Jaw, complete.
- 39. No. 81 Series Interchangeable Jaw, with Male Pipe Jaw, complete.
- 40. No. 81 Series Machinists' Jaw.
- 41. No. 81 Series Pipe Jaw Pin.
- 42. No. 83 Coachmakers' Jaw.
- 43. No. 880 Female Pipe Jaw.
- 44. No. 65 Series Bench Bolt.
- 45. No. 870 Back Jaw.
- 46. No. 870 Slide.
- 47. No. 65 Series Sliding Back Jaw.
- 48. No. 65 Series Stationary Front Jaw.

ble w, ble w, aw. ack ont

